


# SERIES #1: Housekeeping Practices



Community Partners for Healthy Streams is a cooperative effort between the Austell Public Works and local business community.

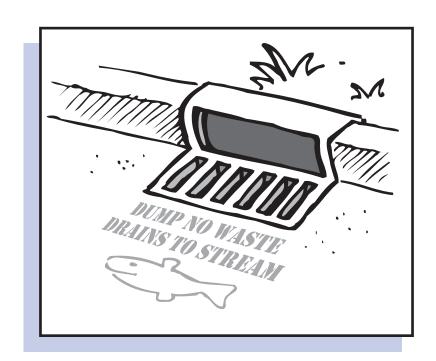

## Storing Materials and Wastes

## Why be concerned?

If materials and wastes aren't properly stored, pollutants can leak from stockpiles and containers and run onto the ground. From there, pollutants can filter through to the ground water table or be washed by rainwater into a lake, river or stream. Reduce risk to the environment by reducing the amount of materials and wastes kept in storage, whenever possible.



## **Choosing Safe Storage Containers**

- Make sure that storage containers are in good condition and lined with a material that won't deteriorate. Outdoor storage containers should be water-tight, rodent-proof and protected from tampering.
- Keep products in their original containers, if possible. Otherwise, clearly label containers and cover the labels with transparent tape to keep them from falling off or weathering.
- Never mix different types of materials or wastes in a single container. This can create excess hazardous waste, prevent recycling, and greatly increase disposal costs.

### **Managing Trash**

Trash containers are a common source of pollutants, especially when they contain damp or oily wastes. (Liquids should not be put into a trash container). Place dumpsters on concrete surfaces and keep their lids tightly closed to keep the rain out. If possible, build a cover over trash containers.

Assign someone to regularly clean up the ground around trash containers. If a container leaks, repair or replace it immediately to avoid polluting.

## Indoor Storage - the Weatherproof Option

Potential pollutants should be stored indoors, unless doing so will increase risks to health and safety. Indoor storage is preferred because it prevents containers from weathering, keeps precipitation out, and prevents spills from infiltrating into the ground.

Indoor storage of certain materials, such as flammable liquids, may affect your fire insurance rating. Consult your insurance carrier regarding questions about storing a material indoors.

If materials must be stored outside, construct a covered, paved area designed to contain leaks and spills. If it's impossible to cover and pave outdoor storage areas, place each primary container within a larger, leak-proof receptacle.


### Designing Storage Areas to Contain Leaks and Spills

Converting an existing room into a secondary containment area is a logical, low-cost approach to safe storage. Prevent runoff from entering or leaving the area by making sure that cracks in floors and corners are completely sealed and that door sills are high enough to contain spills.

If the containment area is located within a larger room or outdoors, construct an impermeable berm around it. Since liquids escaping from punctures must also be contained, make sure that the area is designed (and that containers are placed) in a way that will prevent any escaping liquids from leaving the area.

Design storage areas to completely contain at least 110% of the largest container's total volume. (110% is required by law if you're storing hazardous materials: 150% is required if you're storing materials that are petroleum-based.

See the reverse side for information about properly draining storage areas.



#### **DANGEROUS DRAINAGE:**

#### Storage Areas and the Storm **Sewer System**

Never allow storage areas to drain to any part of the stormwater management system. If you aren't sure where a drain leads, call Austell Public Works for assistance.

If possible, connect drains to a deadend holding tank - especially if you're storing hazardous or petroleum products. If a spill occurs, the tank's contents will need to be pumped out and disposed of by a licensed waste hauler. Although holding tanks incur the cost of pumpouts, they avoid the risk of environmental cleanups costing thousands of dollars.

If you can't drain the area to a holding tank, you may be able to drain it to the sanitary sewer system. Before allowing materials to drain to the sanitary sewer, call Austell Public Works to make sure it can be accepted.

Equip floor drains with shut-off valves in case of a spill. Inspect these valves regularly to ensure proper operation.

WRONG

#### **Unused Materials**

Regularly inspect storage and other areas to make sure that unused materials don't accumulate. Identify and properly dispose of unusable materials, including those abandoned by previous property owners. (If hazardous materials have been abandoned on-site, the original owner or generator is still legally responsible for their disposal.) For more information about waste disposal, see Series #7 (Fact Sheets 7.2 and 7.3).

#### **Managing Stockpiles**

If possible, build a permanent, covered area for stockpiles. Alternatively, place stockpiles on a paved surface and keep them covered with plastic sheeting when not in use. Secure the sheeting with weighted tires or sandbags. Move temporary stockpiles to a permanent storage place as soon as possible.

Assign someone to periodically sweep the area around stockpiles to prevent any materials that escape from washing away with stormwater. If necessary, construct a berm around stockpiles to prevent stormwater from running through them.



#### Regulatory Requirements for Storage and Containment

Make sure that all storage practices conform to federal, state and local requirements, and that all necessary permits have been obtained. Agencies to contact for more information include the Georgia Pollution Prevention Assistance Division, Austell Public Works Stormwater Management, and your local building and fire departments.

### The Perils of **Uncovered Storage**

If it's not possible to cover outside storage areas, rainwater can accumulate. Leaks or spills of chemical or petroleum substances could then be mixed with rainwater, and must be tested before disposal to determine if they have become

• If rainwater is hazardous, have it pumped out and disposed of by a licensed waste hauler.

hazardous.

• If rainwater is not hazardous, discharge it to the sanitary sewer, with prior approval from Austell Public Works. Alternatively, reuse it on your site in an appropriate manner, for example as equipment wash water.

Since automatic sump pumps continuously discharge any hazardous substances that have leaked and become mixed in with rainwater, use a manual sump pump or water vacuum instead. These allow for visual inspection of rainwater before disposal. If flammable materials are being stored, contact your local fire department before installing a manual sump pump.



Austell Public Works Stormwater Management......(770) 944-4325

GA Dept. of Natural Resources Pollution Prevention

Assistance Division ...... (404) 651-5120 (P2AD) or (800) 685-2443

Austell Fire and

Emergency Services ...... (770) 944-6133






## Why be concerned?

Even a small spill can pollute vast amounts of water; one quart of oil can contaminate up to two million gallons of water! In addition to environmental impacts, cleaning up a spill that's reached a lake, river or stream can cost many thousands of dollars. If the source of the spill can be identified, the responsible party is legally liable for all clean-up costs.

It makes good economic sense for any business that uses chemical, petroleum, or even some bulk food products to establish basic procedures to follow in the event of a spill. You may be required to prepare a spill prevention and response plan under federal, state and/or county law (for example, if your business generates regulated amounts of hazardous waste). For more information about spill prevention and response requirements, contact one of the agencies listed under "Getting Help."



#### PREVENTING SPILLS

#### is easier and less costly than cleaning them up

Examine your business practices for ways to prevent spills. For instance:

- Don't leave open containers or tanks that are being filled unattended.
- Use a funnel when transferring liquids from one container to another.
- Place trays under open containers and spouts of liquid storage containers.
- Buy products in smaller quantities, whenever it's cost-effective. A five gallon spill is much easier to cope with than a 55 gallon spill. Hazardous chemical reporting and compliance is also simpler with smaller containers.

## Designing Work Areas to Contain Spills

Spills are more common in certain locations, such as loading, storage, and fueling areas. Design and organize these areas to reduce the chance of spills and to contain any spill that may occur. At a minimum:

- Make sure these areas are paved and, if necessary, bermed around the perimeter.
- Equip floor drains with shut-off valves and regularly inspect these valves to make sure they work. Alternatively, keep rubber mats or temporary plugs on hand so that drain inlets can be blocked immediately if a spill occurs. If plugs are used, train employees in advance about how to use them.

### Preparing a Spill Response Plan

In general, a spill response plan should include the following:

- 1. A description of the facility, including:
  - the owner's name and address
  - activities performed on-site
  - chemicals used and locations of chemical storage areas
  - storm drains and the areas that slope toward each drain
  - the location of spill control devices such as drain shut-off valves
- 2. Regulatory agencies that must be notified in the event of a spill. Since laws governing spill response can be numerous, it's a good idea to protect yourself by calling all of the following numbers:
- Austell Emergency Response: call 911.
- Austell Public Works Stormwater Management (770) 944-4325
- GA Environmental Protection Division: (800) 241-4113.
- (3.) Specific clean-up instructions for each material handled on-site, safety requirements, and guidelines for evacuation.
- 4. Persons responsible for spill clean-up, updating the spill control plan, training staff in clean-up procedures, testing the clean-up kit equipment and maintaining the kit's inventory.

(continued on other side)

Spill containment and clean-up kits should be easy to find and use. Include any needed safety equipment and clean-up materials appropriate to the types and quantities of materials that could spill. For hazardous materials, this information can be found on the product's Material Safety and Data Sheet (MSDS). If you're uncertain about what to include in a spill containment and clean-up kit, many companies that sell spill control materials will provide this information.

Post a summary of your spill control plan at appropriate locations. The summary should include the name(s) of clean-up coordinators, the location of clean-up materials, and who to contact in case of a spill. Periodically review the plan with the employees responsible for its implementation.

## Safe and Successful Spill Response

If a spill occurs, respond immediately and follow your clean-up plan. Never wash spilled materials down a storm drain or sanitary sewer or allow them to evaporate, since pollutants will remain on the ground and can be washed off with the next rain. If the spill is on an unpaved surface, prevent groundwater pollution by removing contaminated soil. Dispose of this soil as hazardous waste if the substance that spilled is hazardous. Otherwise, soil can be placed in a plastic bag and put in a trash receptacle.

First and foremost, protect personal safety and the safety of others. Don't enter an area where toxic materials have spilled without proper protective clothing and gear. Stay upwind, uphill, and upstream of the spill. Get assistance from local authorities and private spill response contractors for anything your employees aren't trained and equipped to handle; names and phone numbers should be listed in your spill control plan. Be sure to:

- Refer to the appropriate MSDS for clean-up instructions and potential safety risks.
- Stop the source of the spill.
- Turn off sump pumps operating in the affected area.

 Contain the spill. If the spill could enter a drain, immediately close the control valve or, if no valve is present, plug or cover the drain inlet (for example, with a rubber mar).

If the spill involves a powder that could blow away, contain it by covering it with plastic or - if it won't react with water - by dampening it with wet towels or a light spray of water. Then, sweep or wipe it up.


If the spill involves a liquid, cover it with an absorbent material that can be swept or picked up such as sawdust or vermiculite. Absorbent booms can be used to contain and soak up larger spills.

Unless the material has a high flash point, avoid the use of emulsifiers and dispersants. The goal is to contain the spill — not scatter it. Similarly, don't use a hose or wet mop. Using water adds to the volume of the spill and spreads the material around a larger area.

 Report significant spills to the appropriate authorities and get outside help if needed. If a hazardous substance could enter the sanitary sewer system, notify Austell Public Works.

## Disposing of Clean-Up Materials

- In general, absorbent materials used to clean up hazardous substances (including gasoline and solvents) must be disposed of as hazardous waste.
- Rags used to soak up non-hazardous spills should *not* be put in a trash container.
   Store them in a covered bin and send them to a professional cleaning service.



 Floor scrubbing machines should be discharged to a sanitary sewer – never to a storm drain or swale.

#### **GETTING HELP**

#### General Information: GA Dept. of Natural Resources Pollution Prevention Assistance Division $(P^2AD) \ .... \ (404) \ 651\text{-}5120$ or (800) 685-2443 Austell Fire and Emergency Services ...... (770) 944-6133 Austell Public Works Stormwater Management ......(770) 944-4325 Emergency Response: Austell Police Department.......911 GA Environmental Protection Division (GAEPD).....(404) 656-4863 or (800) 241-4113 Austell Public Works Stormwater Management......(770) 944-4325



## Community Partners for Healthy Streams Fact Sheets

	SERIES #1 - HOUSEKEEPING PRACTICES Fact Sheet 1.1 Storing Materials and Wastes Fact Sheet 1.2 Preventing and Cleaning Up Spills
76	SERIES #2 - MAINTAINING ENGINEERED STORMWATER CONTROLS Fact Sheet 2.1
	SERIES #3 - MAINTAINING EQUIPMENT AND VEHICLES Fact Sheet 3.1 Storing and Maintaining Equipment and Vehicles Fact Sheet 3.2 Washing Equipment and Vehicles
	SERIES #4 - MAINTAINING BUILDINGS AND PAVEMENT Fact Sheet 4.1
E S	SERIES #5 - MAINTAINING LANDSCAPES Fact Sheet 5.1 Maintaining Healthy Lawns, Shrubs and Trees Fact Sheet 5.2 Using Fertilizer Fact Sheet 5.3 Integrated Pest Management Fact Sheet 5.4 Using Pesticides
	SERIES #6 - SITE DESIGN AND CONSTRUCTION  Fact Sheet 6.1 Designing Landscapes for Water Quality Fact Sheet 6.2 Designing Stormwater Management Systems Fact Sheet 6.3 Clearing and Grading Land
(A)	SERIES #7 - MANAGING WASTES Fact Sheet 7.1 Minimizing Waste Fact Sheet 7.2 Recycling Fact Sheet 7.3 Waste Disposal
	SERIES #8 - EDUCATION Fact Sheet 8.1 Education and Community Leadership
Fig	SERIES #9 - FATS, OILS AND GREASE Fact Sheet 9.1 Food Service Industry Fats, Oil and Grease Recycling/Proper Disposal
	SERIES #10 - PRESCRIPTION DRUG AND PERSONAL CARE PRODUCTS Fact Sheet 10.1



This is an official publication of the City of Austell

### CITY OF AUSTELL - GEORGIA Austell Public Works austellga.gov

5000 Austell-Powder Springs Road, Suite 133 Austell, GA 30106